

Capatect-Sockelschiene 6700

Base rail; L-shaped light metal profile with front side drip-edge

Product Description

Field of Application

Profile for starting up Capatect ETICS Systems A + B.
Base supporting and protective rail for the lower end.

Material Properties

■ Extruded aluminium profile
Keeps ETICS bottom edge closed and protected .
Easy to install due to form- and dimension stability
Fast water drainage.

Colours

Aluminium blank


Storage

Store dry and horizontally. Protect from moisture.

Product No.

Product-No.	Insulation Layer Thickness [mm]	Throat Depth [mm]	Length [mm]	Packaging [units]
6700/05	50	53	2000	10 = 20 m
6700/06	60	63		
6700/07	70	73		
6700/08	80	83		
6700/10	100	103		
6700/12	120	123		
6700/14	140	143		
6700/15	150	153		
6700/16	160	163		
6700/18	180	183		
6700/20	200	203		

Special profiles on request

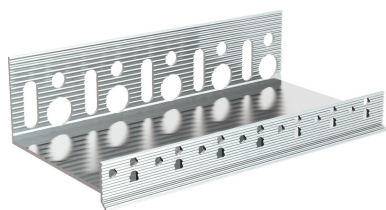

Sales programme

Bits and pieces for mounting

Product N°		Carton containing
619/00	Capatect-Montage-Set klein (small)	80 knock-in anchors, Ø 6 mm, length 60 mm 20 base rail connectors
619/01	Capatect-Montage-Set groß (large)	150 knock-in anchors, Ø 6 mm, length 60 mm 40 base rail connectors 50 spacers, 3 mm thick
634/50	Capatect-Distanzstücke-Set	190 spacers, 3 mm thick 190 spacers, 5 mm thick 20 spacers, 10 mm thick
612/06	Capatect-Montage-Schlagschrauben	100 knock-in anchors, Ø 8 mm length 60 mm
612/08	Capatect-Montage-Schlagschrauben	100 knock-in anchors, Ø 8 mm length 80 mm

Additional elements (optional)

Product N°		Carton containing	Description
6690/05–20	Capatect-Sockel-Eckprofil „Plus“	5 units	Element for external corner; to be bended up to 90 ° due to v-notched back side centered excerpt; length 835 mm*
6680/10	Capatect-Sockel-schienen-Aufsteckprofil „Plus“ (Type 10)	10 units	Clip-on profile for enlargement of the reinforcement coat up to 6 – 10 mm; length 200 cm

* Fixing with minimum two knock-in anchors each side.

Application

Substrate Preparation

Remove putty-burs and fill cavities in render/plaster. Remove adherent oil films (extruder remnants) from profiles.

Consumption

per meter: 1 m

Installation

Select the Capatect-Sockelschiene according to the insulation board thickness. Mark the base line by chalk line. Fix the base rail using components of the Capatect Montage set. Max distens of anchors: 30 cm. Elongated mounting holes facilitate an exact alignment.

Use base rail connectors for exact distance to the subsequent profile and alignment . Fill substrate irregularities with the Capatect spacers in the right thickness before final knock-in of the anchors.

Advice

Customer Service Centre

Tel.: +49 6154 71-71710
Fax: +49 6154 71-71711
e-mail: kundenservicecenter@caparol.de

International Distribution: Please see www.caparol.com

Technical Information No. 6700 · Issue: July 2016

All suggestions and application instructions herein are based on our latest technical experience. Due to the wide variety of individual project conditions, we cannot be held responsible for their content. These instructions do not release the purchaser/ applicator from his responsibility to determine the suitability of the product in consideration of the project characteristics. These instructions are to be considered void when a new edition is released. Our general conditions of sale and delivery in their latest edition apply. This document is a translation of our German Technical Information No.6700 · Capatect-Sockelschiene 6700 · Issued: June 2020